
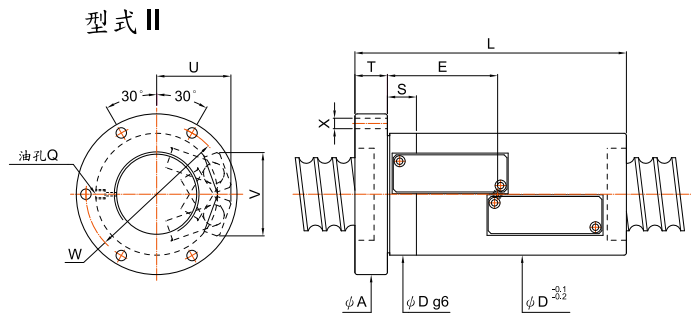


FSVH

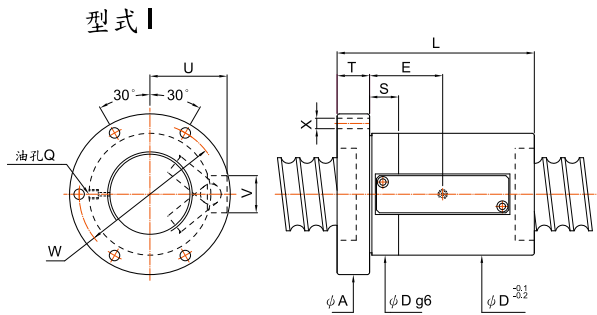

單位 mm

螺桿尺寸 外徑 導程	鋼珠 尺寸	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭			配合	油孔		螺絲孔	循環管凸出部		型式	
			動負荷 (1×10 ⁶ REV.) Ca	靜負荷 Co	Dg6	L	A	T	W	S	Q	E	X	V	U		
50	16	12.7	6x1	24800	63700	95	168	128	28	112	20	PT1/8"	62	9	32	60	I
		12.7	3.5x2	31200	83500		200	128	28	112	20		78	9	72	62	II
55	16	12.7	6x1	25800	71800	100	168	133	28	115	20	PT1/8"	62	9	32	63	I
		12.7	3.5x2	32600	94000	200	133	28	115	20	78		9	74	64	II	
63	16	12.7	6x1	27800	81700	105	168	138	28	122	25	PT1/8"	62	9	32	67	I
		12.7	3.5x2	35000	107000	105	202	138	28	122	25		79	9	77	68	II
		12.7	6x2	50300	164000	105	266	138	28	122	25		111	9	77	68	II
	20	15.875	2.5x2	35900	99300	116	210	157	32	137	25	PT1/8"	81	11	86	75	II
		15.875	3.5x2	46600	134700	116	246	157	32	137	25		97	11	86	75	II
25	15.875	2.5x2	35900	99300	116	235	157	32	137	25	PT1/8"	91	11	86	75	II	
80	16	12.7	6x1	30900	104400	120	172	158	32	139	25	PT1/8"	62	9	36	73	I
		12.7	3.5x2	39000	136700	120	205	158	32	139	25		78	9	85	75	II
		12.7	6x2	56000	208700	120	275	158	32	139	25		116	9	85	75	II
	20	15.875	2.5x2	40100	127000	130	210	168	32	150	25	PT1/8"	80	11	90	82	II
		15.875	3.5x2	52100	172400	130	250	168	32	150	25		100	11	90	82	II
	25	15.875	6x2	75000	263200	130	330	168	32	150	30	PT1/8"	140	11	90	82	II
		19.05	3.5x2	67700	206100	145	305	188	40	165	25		119	11	106	94	II
19.05	6x2	97200	314600	145	402	188	40	165	30	168	11	106	94	II			
100	16	12.7	6x1	34200	133200	145	172	185	32	165	25	PT1/8"	62	11	40	86	I
		12.7	3.5x2	43200	174500	145	205	185	32	165	25		78	11	97	88	II
		12.7	6x2	62000	266300	145	275	185	32	165	25		116	11	97	88	II
	20	15.875	2.5x2	44800	160900	150	205	194	32	172	30	PT1/8"	76	11	106	94	II
		15.875	3.5x2	58300	218400	150	245	194	32	172	30		96	11	106	94	II
		15.875	6x2	83800	333300	150	330	194	32	172	30		141	11	106	94	II
	25	19.05	3.5x2	74900	260200	165	305	218	40	190	30	PT1/8"	119	11	117	104	II
		19.05	6x2	107700	397100	165	410	218	40	190	30		174	11	117	104	II