


CR 中碳鋼鍍鉻軸心



◆ 材質
中碳鋼 S45C + 表面鍍硬鉻

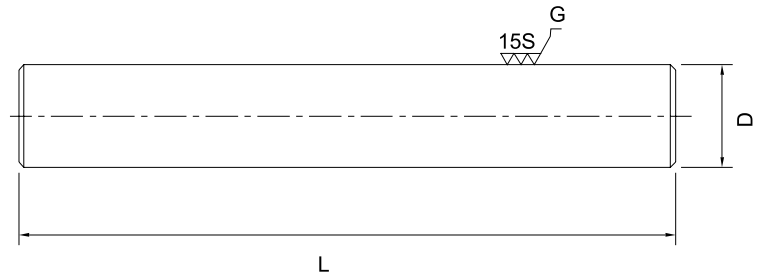

型號	外徑 D	外徑精度 f8 (mm)	長度 L (mm)	表面硬鉻長度 (μm)	重量 (kg)
CR8	8	-0.013~0.035	2500	15 μm ~25 μm	0.39
CR10	10	-0.013~0.035	3000		0.62
CR12	12	-0.016~0.043	3000		0.89
CR15	15	-0.016~0.043	3000		1.39
CR16	16	-0.016~0.043	3000		1.58
CR18	18	-0.016~0.043	3000		2.0
CR20	20	-0.020~0.053	3000		2.47
CR25	25	-0.020~0.053	3000		3.87
CR30	30	-0.020~0.053	3000		5.55
CR35	35	-0.025~0.064	3000		7.56
CR40	40	-0.025~0.064	3000		9.39
CR45	45	-0.025~0.064	3000		12.5
CR50	50	-0.025~0.064	3000		15.4
CR55	55	-0.030~0.076	3000		18.7
CR60	60	-0.030~0.076	3000		22.2
CR65	65	-0.030~0.076	3000		26.1
CR70	70	-0.030~0.076	3000		30.2
CR75	75	-0.030~0.076	3000		34.7
CR80	80	-0.030~0.076	3000		38.5
CR90	90	-0.036~0.090	3000		49.9
CR100	100	-0.036~0.090	3000	61.7	
CR120	120	-0.036~0.090	3000	88.8	

說明 其它大尺寸可接受訂製。

WCS 高週波鍍鉻軸心




◆ 材質

軸承鋼 SUJ2 + 表面鍍硬鉻

◆ 硬度

HRC 58±2

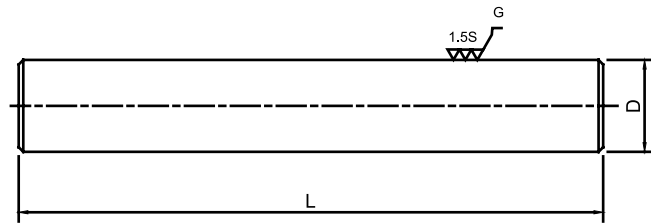

型號	外徑 D	外徑精度 g6 (mm)	長度 L (mm)	硬化深度 (mm)	重量 (kg/m)
WCS3	3	-0.004~0.012	400	>0.8 0.8 and more	0.06
WCS4	4	-0.004~0.012	400		0.10
WCS5	5	-0.004~0.012	1000		0.16
WCS6	6	-0.004~0.012	2500		0.22
WCS8	8	-0.005~0.014	2500	>1.0 1.0 and more	0.40
WCS10	10	-0.005~0.014	3000		0.62
WCS12	12	-0.006~0.017	3000		0.89
WCS13	13	-0.006~0.017	3000	>1.5 1.5 and more	1.04
WCS16	16	-0.006~0.017	3000		1.58
WCS20	20	-0.007~0.020	3000		2.47
WCS25	25	-0.007~0.020	3000	>2.0 2.0 and more	3.85
WCS30	30	-0.007~0.020	3000		5.55
WCS35	35	-0.009~0.025	3000	>2.5 2.5 and more	7.55
WCS40	40	-0.009~0.025	3000		9.87
WCS56	50	-0.009~0.025	3000	>3.0 3.0 and more	15.40
WCS60	60	-0.010~0.029	3000		22.20
WCS80	80	-0.010~0.029	3000		39.45
WCS100	100	-0.012~0.034	3000		61.65

SOAR
線性軸承